


Bubble 3000 Stable White 3000K Ceiling Mounted with Joint

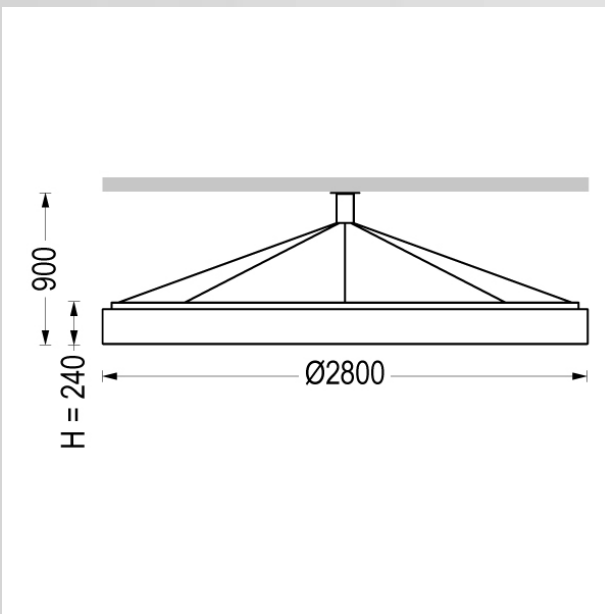

GENERAL INFORMATION:

Place installation:	indoor
Environments:	hallway, conference hall, art and culture, leisure areas, retail areas, places of worship
Product Code:	T15SL607AE

FINISHES:

-AE	white RAL 9003
-----	----------------

PHYSICAL:

Installation type:	ceiling
Mounting type:	surface
Body:	Round metal frame, seats for the electrical components and anchor points for the suspension device and diffusers.
Glow wire resistant:	850°C

DIMENSIONS :

H: Total height device	240mm(9,44")
D: Total diameter device	2800mm(110,23")
Weight	60 kg

OPTICAL SYSTEMS:

Emission:	diffuse
Optical System:	Smooth opal polycarbonate diffuser, injection moulded, shock-resistant, anti-ageing.

SOURCES:

Source Type:	LED
System Power:	600W
Source:	24 LED engine
Sources Temperature Colour:	3000K CRI>80
Output Flux:	31530 lm
MacAdam:	Step 3

ELECTRICAL:

Ballast type:	Electronic
Mounting ballast type:	Integral
Voltage:	110-277V
Frequency:	50-60Hz
Wiring:	Electrical harness wired for 110-277V-AC 50-60Hz power supply. 2.5mm ² LTN terminal block. Electronic ballast.

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

Bubble 3000 Stable White 3000K Ceiling Mounted with Joint


INCLUDED ACCESSORIES:

Electrical:	Power cable L=2000mm LED sources 3000K
Mounting:	Suspension kit complete with 8 cables connected to the central joint, terminal block and plate for direct ceiling fixation

OPTIONAL ACCESSORIES:

Mounting:

Accessory code:	150A031VE
Technical description:	BUBBLE 3000 - Umbrella like gauge for assembly and support.

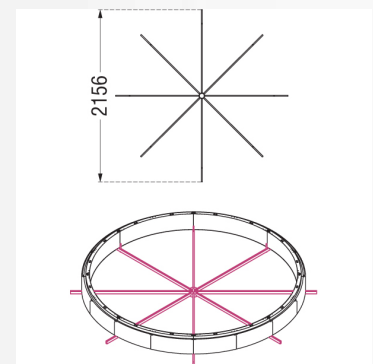

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

g@gordonbullard.com
www.cerchiolighting.com
269-569-6700



991 South Gull Lake Dr
Richland, MI 49083, USA
1 877-964-4646