

BYTE tondo

6356

CODE:

6356

TYPOLOGY:

recessed lamp

MATERIALS:

aluminium

LIGHT:

direct

BULBS:

/W - LED max 2W 500 mA 209lm 4000K

/WW - LED max 2W 500 mA 199lm 3000K

IP GRADE:

IP 40

NET WEIGHT:

0,03 Kg


FINISHING:

.01 white

.45 aluminium anodized



DIMENSIONS:

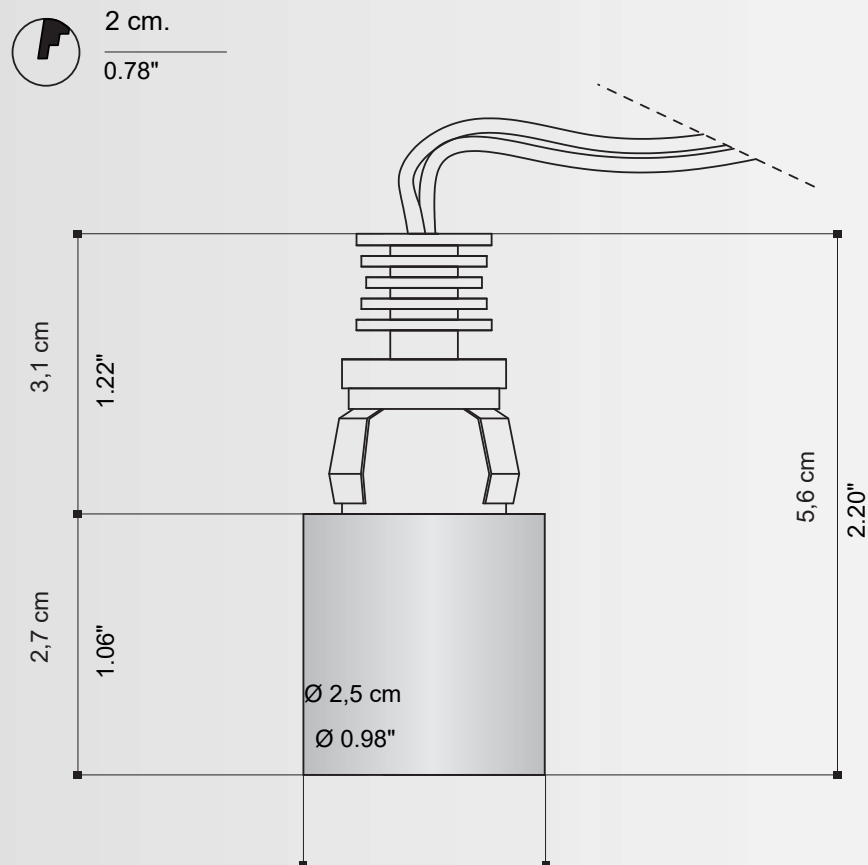

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request


ACCESSORIES:

LED DRIVERS constant current.

0127

LED driver
IN: 100 - 240V
OUT: 500 mA
1-6 Power LED 2W
1-6 Power LED 2W - art.0120-0122

11,6 x 3,4 x 2 cm




DIMMABLE LED DRIVERS constant current.

0129 Dimmer Led Multipower dimmable driver


IN: 110 - 240V
OUT: 500 mA, 1-14 Power LED

10,5 x 7 x 2,2 cm



0129/DALI Dimmer Led
Multipower dimmable driver IN: 110 - 240V
OUT: 500 mA, 2-12 Power LED


10,5 x 7 x 2,2 cm



0141/DALI

LED driver
IN: 110 - 240V
OUT: 500 mA, 1-11 Power LED

11,1 x 5,2 x 2,5 cm




0141/DIM

LED driver
IN: 110 - 240V
OUT: 500 mA, 1-11 Power LED

PUSH version not synchronizable


11,1 x 5,2 x 2,5 cm



0145 Dimmer Led Maxi Multipower dimmable driver

IN: 110 - 240V
OUT: 500 mA, 1-21 power LED


12,3 x 8 x 2,2 cm



0145/DALI Dimmer Led Maxi
Multipower dimmable driver

IN: 110 - 240V
OUT: 500 mA, 1-21 power LED

12,3 x 8 x 2,2 cm

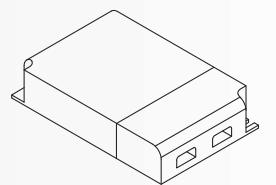

0133

Sincronization cable for dimmer Led
(art. 0129 - art. 0129DALI - art. 0145 - art. 0145DALI)



Lunghezza: 150cm.

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request